

## Features

Over-Voltage Protection  
Over-Current Protection

Limit current Protection

Short-circuit Protection  
100%Hi-pot & ATE Tested

100%Burn-in under (40°C)

Low Ripple/Noise  
MTBF 50000 HRS At 25°C

LVD authentication

DoE VI and CoC Tier VI Efficiency  
Regulations Compliance

Cispr 22 CLASS B, VCCI CLASS B,  
FCC Part15 CLASS B, Compliance

## PS1006 Series

Wall Mount- Interchangeable-Side Plug-In




## Specification

Item	Model No	PS1006-xxxxyyzzz		
	Transformer	EE13-1	EE13-1	EE13-2
Output Voltage		5V	7.5V	12V
Output Current(Max.)		1.2A	1.0A	0.6A
Output Power(Max.)		6W	7.5W	7.2W
Input Voltage		AC90~264V		
Input Frequency		47~63Hz		
Input Current		0.3A Max		
Inrush Current		40A Max		
Line Regulation		1% Max		
Ripple&Noise		2% Max		
Load Regulation		5% Max		
Efficiency		DoE VI & CoC Tier 2 VI		
Operating Temperature		0~40°C		
Storage Temperature		-20~85°C		
Over-Voltage Protection		Auto Recovery		
Short-circuit Protection		Auto Recovery		
Safety Standard		CB,CCC,UL,cUL,TUV-GS,SAA,RCM,KC,KCC,KMEPS,Nrcan,DoE,IRAM		
EMC(EMI/EMS)		CE,FCC,VCCI,RCM		

機種編碼 Products code:

PS 1 006 XXX SI B XXX XXX XX

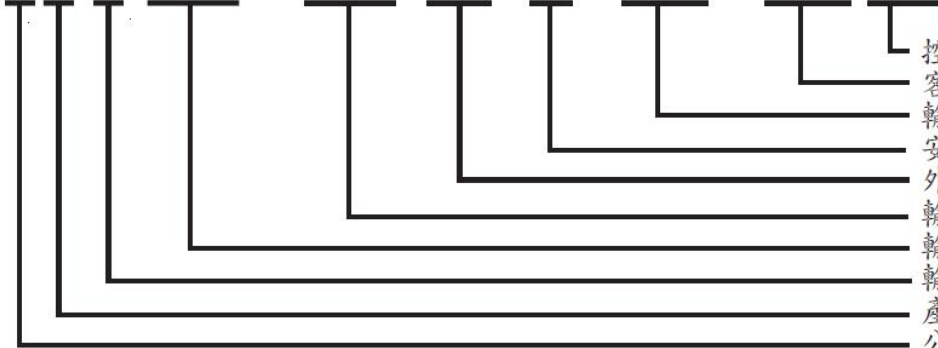

Ctrl Nbr  
 Customer code  
 Output Current  
 A:ClassI/B:ClassII  
 Case type  
 Output voltage  
 Output power  
 Output: Single/Multi  
 Product type  
 P E C

